

DHI-KTP03

IP Indoor Monitor & Villa Station



Technical Specification

DHI-VTH2621G-P

System

Main Processor	Embedded processor
Operating System	Embedded Linux operating system
Network Protocol	RTSP; RTP; SIP; DNS; SSH
ROM	128 MB
RAM	128 MB
CPU	Dual core 1.2GHz

Basic

Screen Type	Capacitive touchscreen
Display	7" TFT
Screen Resolution	1024 × 600
Audio Compression	G.711a; G.711u; PCM
Audio Input	1
Audio Output	Built-in speaker
Audio Mode	2-way Audio
Audio Enhancement	Echo suppression
Audio Bit Rate	16 kHz; 16 bit

Function

Communication Mode	Full digital
--------------------	--------------

IP Indoor Monitor

- 7" TFT capacitive touch screen, 1024 x 600
- 6-channel alarm input and 1-channel alarm output
- standard PoE
- outdoor station and IPC monitor.
- H.265 and H.264 video decoding
- High performance & cost-effective

Villa Station

- High definition camera; WDR
- Operating temperature -30 °C-60°C
- IP65
- auto IR illumination and D/N
- Card/app remote/indoor monitor (VTH) unlock
- 2-channel voice call and supports calls between door stations and app
- 10,000 cards
- Tamper Alarm
- Support standard PoE power supply
- Control two locks
- Quick configuration without computers

Switch

- Port1-4: 4 × RJ-45 10/100 M (PoE)
- Port 5: 1 × RJ-45 10/100 M (uplink)
- Supports guide rail mount



Information Release	Receive and view text information released by the management center
DND Mode	Do not disturb period can be set; Do not disturb mode
Number of Extensions	Villa: 9 Apartment: 4

Performance

Casing	PC + ABS
--------	----------

Port

Alarm Input	6
Alarm Output	1
Power Output	1 (12 V/200 mA)
Door Bell	Yes (use any alarm input port)
Network	One 10 Mbps/100 Mbps Ethernet

Alarm

SOS	Yes
-----	-----

DHI-KTP03

General

Color	Black
Power Supply	12 VDC 1A; Standard PoE (36–57 V, 0.35 A)
Installation	Surface Mount
Certifications	CE; FCC
Accessory	Bracket and alarm ribbon cable (included)
Dimensions	189.6 mm × 134.6 mm × 26.0 mm (7.50" × 5.30" × 1.00")
Operating Temperature	–10 °C to +55 °C (+14 °F to 131 °F)
Operating Humidity	10%–95% RH (non-condensing)
Operating Altitude	Beneath 3,000 m (9,842.52 ft)
Power Consumption	Standby ≤ 2 W; working ≤ 6 W
Net Weight	0.34 kg (0.74 lb)
Gross Weight	0.58 kg (1.27 lb)

DHI-VTO2111D-P-S2

System

Main Processor	Embedded processor
Operating System	Embedded Linux operating system
Button Type	Mechanical
Interoperability	ONVIF; CGI
Internet Protocol	RTSP; RTMP; HTTP/HTTPS; DNS; FTP; UPnP; RTP; SIP; SSH; ONVIF; P2P
ROM	128 MB
RAM	256 MB
CPU	Dual-core 900 MHz

Basic

Camera	1/2.7" 2MP CMOS
Angle of View	H: 107°; V: 61°; D: 122°
Focal Length	2.0 mm
WDR	120 dB
Noise Reduction	3D NR
Video Compression	H.264
Video Resolution	50 Hz: Main stream (720p@25 fps), sub stream (1080p@25 fps) 60 Hz: Main stream (720p@30 fps), sub stream (1080p@30 fps)
Frame Rate	25fps
Video Bit Rate	256 Kbps to 4 Mbps
Light Compensation	Auto IR
D/N	Yes
Audio Compression	G.711a; G.711u; PCM

Audio Input	1
Audio Output	Built-in speaker
Audio Mode	2-way Audio
Audio Enhancement	Echo suppression and cancellation/digital noise reduction
Audio Bit Rate	16 kHz, 16 bit

Function

Communication	Full digital
Unlock Mode	Card/remote unlock
Card Type	IC card
Motion Detection	Video motion detection
Auto Snapshot	Auto snapshot can only be enabled on indoor monitors
Leave Videos	Yes (SD card is needed)
Storage	Extensible 64 GB TF card
Web Configuration	Yes

Performance

Card Reading Distance	3–5 cm
Casing	PC + Acrylic

Capacity

Card	10,000
------	--------

Port

RS-485	1
Alarm Output	1
Exit Button	1
Door Status Detection	1
Lock Control	1
Network	One 10 Mbps/100 Mbps Ethernet (8-core white ribbon cable)

Alarm

Tamper	Yes
--------	-----

General

Appearance Color	Black
Power Supply	12 VDC 1A; Standard PoE(36–57 V, 0.35 A)
Power Adapter	Surface mount
Installation	CE; FCC; UL
Certifications	Brackets and alarm ribbon cable
Accessories	135 mm × 70.4 mm × 34.4 mm (5.31" × 2.77" × 1.35")
Dimensions	IP65 (silicone sealant is needed, see the quick start guide)
Operating Temperature	–30 °C to +60 °C (–20 °F to +60 °F)
Operating Humidity	10%–95% RH (non-condensing)
Operating Altitude	Beneath 3,000 m (9,842.52 ft)

DHI-KTP03


Power Consumption	Standby ≤ 2 W; working ≤ 6 W
Gross Weight	0.25 kg (0.55 lb)
Gross Weight	0.25 kg (0.55 lb)
Net Weight	0.32 kg (0.72 lb)

DH-PFS3005-4ET-36E

System	
Main Processor	Embedded processor
Network Protocol	IEEE802.3; IEEE802.3u; IEEE802.3x IEEE802.3af/ IEEE802.3at/ Hi-PoE
Function	
Communication Mode	Full digital
Performances	
Casing	SECC
Port	
Network Port	Port1-4: 4 \times RJ-45 10/100 M (PoE) Port 5: 1 \times RJ-45 10/100 M (uplink)

General	
Appearance color	Black
Power Supply	100–240 VAC;50/60Hz
Certifications	CE; FCC; UL
Accessory	power cable included
Product Dimensions	170 mm \times 120 mm \times 34 mm (6.69" \times 4.72" \times 1.34")
Operating Temperature	-10 $^{\circ}$ C to +55 $^{\circ}$ C (+14 $^{\circ}$ F to +131 $^{\circ}$ F)
Operating Humidity	10%–95% RH, non-condensing
Operating Altitude	Beneath 3,000 m (9,842.52 ft)
Power Consumption	≤ 30 W
Net Weight	0.51 kg (1.12 lb)
Gross Weight	0.85 kg(1.87 lb)

Dimensions (mm[inch])

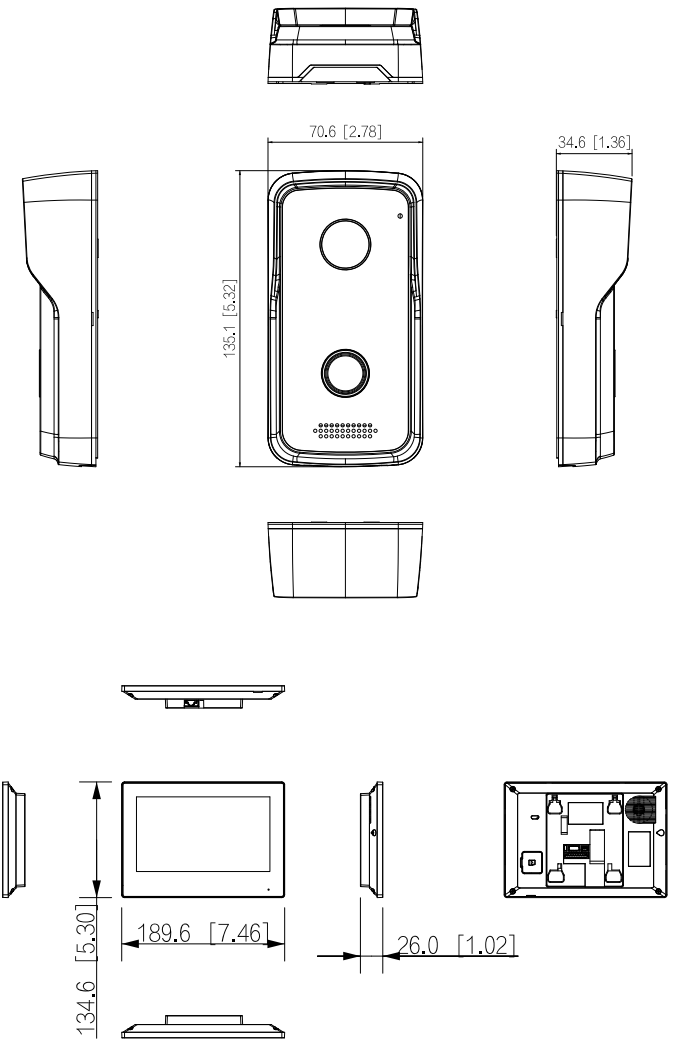

Application

